



Universal uni-/bipolar signal transmitter

4104

- Measures and outputs uni-/bipolar voltage and current signals
- Works with both passive and active inputs and outputs
- Uses the 4501 display for programming and process monitoring
- Fast < 20 ms response time and excellent < 0.05% accuracy
- Universally powered by 21.6...253 VAC / 19.2...300 VDC



Application

- Fast < 20 ms response time for measuring signals produced by torque, position, current & acceleration sensors.
- User configurable bipolar or unipolar I/O means the 4104 is suitable for nearly any voltage or current conversion.
- The excitation source enables measurement of two or three wire transmitters.
- The active or passive I/O makes the 4104 perfect for power matching current loops.
- Converts narrow bipolar inputs to wide bipolar or unipolar outputs, e.g., ± 1 volt input = ± 10 volt or 4...20 mA output.
- Selectable direct or inverse I/O makes the 4104 suitable for proportional control applications.
- The "V-curve" function outputs 100% – 0 – 100% when a 0 – 100% input signal is present.

Technical characteristics


- The latest analog and digital techniques are used to obtain maximum accuracy and immunity to interference.
- The current output can drive up to 800 Ohms, with an adjustable response time of 0.0...60.0 seconds.
- Exceptional mA output load stability of < 0.001% of span/100 Ohm.
- Meets the NAMUR NE21 recommendations, ensuring high accuracy in harsh EMC environments.
- Meets the NAMUR NE43 recommendations, allowing the control system to easily detect a sensor error.
- Each unit is tested to a high 2.3 kVAC, 3-port galvanic isolation level.
- Excellent signal to noise ratio of > 60 dB.

Mounting / installation / programming


- Very low power consumption means units can be mounted side by side without an air gap – even at 60°C ambient temperature.
- Approved for marine applications.
- Programming, monitoring, and 2-point process calibration is accomplished with the 4501 detachable display.
- All programming can be password protected.

Connections


Input signals

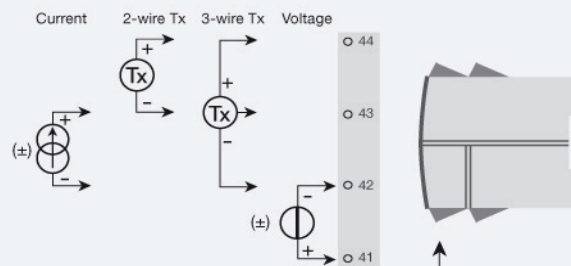

Output signals

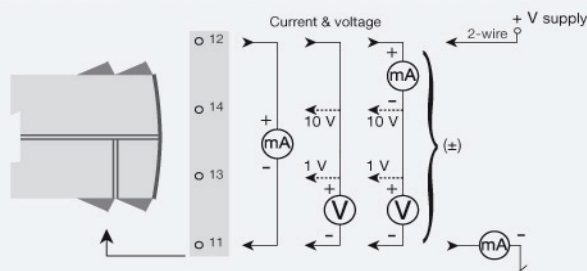

Supply



Order:

Type
4104

Environmental Conditions

Specifications range.....	-20°C to +60°C
Storage temperature.....	-20°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20
Installation in.....	Pollution degree 2 & measurement / overvoltage cat. II

Mechanical specifications

Dimensions (HxWxD).....	109 x 23.5 x 104 mm
Dimensions (HxWxD) w/ 4501 / 4511.....	109 x 23.5 x 116 / 131 mm
Weight approx.....	250 g
Weight incl. 4501 / 4511 (approx.).....	265 g / 350 g
DIN rail type.....	DIN EN 60715/35 mm
Wire size.....	0.13...2.08 mm ² AWG 26...14 stranded wire
Screw terminal torque.....	0.5 Nm
Vibration.....	IEC 60068-2-6 : 2007
Vibration: 2...13.2 Hz.....	±1 mm
Vibration: 13.2...100 Hz.....	±0.7 g

Common specifications

Supply voltage, universal.....	21.6...253 VAC, 50...60 Hz or 19.2...300 VDC
Max. power consumption.....	≤ 2.5 W
Internal consumption.....	≤ 2.0 W
Isolation voltage, test / working.....	2.3 kVAC / 250 VAC
Communications interface.....	Communication enabler 4511 / Programming front 4501
Signal / noise ratio.....	> 60 dB
Response time (0...90%, 100...10%).....	< 20 ms
Accuracy.....	Better than 0.05% of selected range
Cut-off frequency (3 dB).....	> 40 Hz
EMC immunity influence.....	< ±0.5% of span
Extended EMC immunity: NAMUR NE 21, A criterion, burst.....	< ±1% of span

Input specifications

Current input: Signal range.....	±23 mA
Current input: Programmable measurement ranges.....	0...20 and 4...20 mA
Current input: Programmable measurement ranges.....	± 10 and ± 20 mA
Input voltage drop.....	1.4 V @ 20 mA
Loop error detection, 4...20 mA: Low.....	< 3.6 mA
Loop error detection, 4...20 mA: High.....	> 21 mA
2-wire loop supply, (terminal 43 & 44).....	> 16 V / 20 mA
3-wire loop supply, (terminal 42 & 44).....	> 18 V / 20 mA
Loop supply limitation, terminal 44, nom.....	30 mA
Voltage input: Signal range.....	±12 V
Programmable measurement ranges, VDC.....	0/0.2...1, 0/1...5, 0/2...10 VDC
Programmable measurement ranges, VDC.....	±1, ±5 and ±10 V
Input resistance, voltage input.....	> 2 MΩ

Output specifications

Current output: Signal range.....	0...23 mA (unipolar)
Current output: Signal range.....	-23...+23 mA (bipolar)
Load stability, current output.....	≤ 0.001% of span / 100 Ω
Current limit.....	≤ 28 mA (unipolar)
Current limit.....	± 28 mA (bipolar)
Programmable damping, current signals.....	0.0...60.0 s
Output limitation, on 4...20 and 20...4 mA signals.....	3.8...20.5 mA
Output limitation, on other unipolar mA signals.....	0 and 115% of max. value
Output limitation, on bipolar mA signals.....	±115% of min. & max. values
Current output: Active unipolar and bipolar programmable ranges.....	0...20 and 4...20 mA
Current output: Active unipolar and bipolar programmable ranges.....	±10 and ±20 mA
Current output: Active unipolar and bipolar programmable ranges.....	Direct or Inverted Action
V-curve function, active signals, 100-0-100%.....	20-0-20 mA
Load (max.).....	800 Ω / ±16 V @ ±20 mA
Passive 2-wire mA output: Programmable ranges.....	0...20 and 4...20 mA
Passive 2-wire mA output: Programmable ranges.....	Direct or Inverted action
V-curve function, passive signals, 100-0-100%.....	20-0-20 mA
External loop supply.....	3.5 - 26 V
Programmable voltage ranges.....	0/0.2...1; 0/1...5; 0/2...10 V
Programmable voltage ranges.....	±1, ±5 and ±10 V
Programmable voltage ranges.....	Direct or Inverted action
V-curve function, voltage output, 100-0-100%.....	1-0-1, 5-0-5 and 10-0-10 V
Load (min.).....	> 500 kΩ
Programmable damping, voltage signals.....	0.0...60.0 s
Output limitation - outside range: on unipolar V signals starting from 0.....	0 and 115% of max. value
Output limitation - outside range: on unipolar V signals with offset.....	-5% of min. value and 115% of max. value
Output limitation - outside range: on bipolar V signals.....	±115% of min. & max. values
Sensor error indication, at 4...20 mA input: selectable.....	Low, High, Zero, None

Approvals

EMC.....	EN 61326-1
LVD 2006/95/EC.....	EN 61010-1
UL.....	UL 508
FM.....	3025177
EAC TR-CU 020/2011.....	EN 61326-1
DNV Marine.....	Stand. f. Certific. No. 2.4

Universal transmitter



4114

- Input for RTD, TC, Ohm, potentiometer, mA and V
- 2-wire supply > 16 V
- FM-approved for installation in Div. 2
- Output for current and voltage
- Universal AC or DC supply



Advanced features

- Programmable by way of detachable display front (4501), process calibration, signal simulation, password protection, error diagnostics and help text available in several languages.

Application


- Linearized, electronic temperature measurement with RTD or TC sensor.
- Conversion of linear resistance variation to a standard analog current / voltage signal, i.e. from solenoids and butterfly valves or linear movements with attached potentiometer.
- Power supply and signal isolator for 2-wire transmitters.
- Process control with standard analog output.
- Galvanic separation of analog signals and measurement of floating signals.
- The 4114 is designed according to strict safety requirements and is therefore suitable for application in SIL 2 installations.

Technical characteristics


- When 4114 is used with the 4501 display / programming front, all operational parameters can be modified to suit any application. As the 4114 is designed with electronic hardware switches, it is not necessary to open the device for setting of DIP-switches.
- A green / red front LED indicates normal operation and malfunction.
- Continuous check of vital stored data for safety reasons.
- 3-port 2.3 kVAC galvanic isolation.

Connections


Input signals:

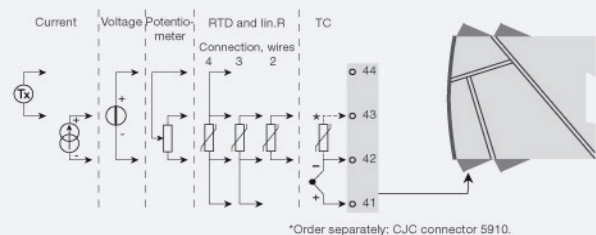

Output signals:

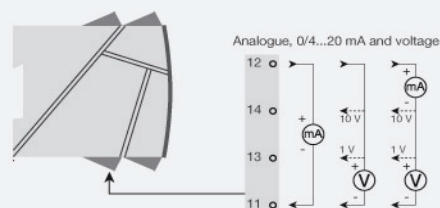

Supply:

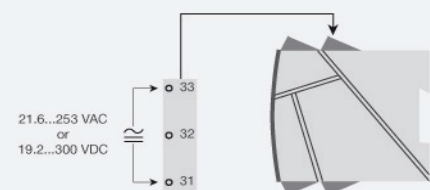

Order:

Type
4114

Environmental Conditions

Specifications range.....	-20°C to +60°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20

Mechanical specifications

Dimensions (HxWxD).....	109 x 23.5 x 104 mm
Dimensions (HxWxD) w/ 4501 / 4511.....	109 x 23.5 x 116 / 131 mm
Weight approx.....	145 g
Weight incl. 4501 / 4511 (approx.).....	160 g / 245 g
Wire size.....	1 x 2.5 mm ² stranded wire
Screw terminal torque.....	0.5 Nm
Vibration.....	IEC 60068-2-6 : 2007
Vibration: 2...13.2 Hz.....	±1 mm
Vibration: 13.2...100 Hz.....	±0.7 g

Common specifications

Supply voltage, universal.....	21.6...253 VAC, 50...60 Hz or 19.2...300 VDC
Fuse.....	400 mA SB / 250 VAC
Max. power consumption.....	≤ 2.0 W
Isolation voltage, test / working.....	2.3 kVAC / 250 VAC
Communications interface.....	Communication enabler 4511 / Programming front 4501
Signal / noise ratio.....	Min. 60 dB (0...100 kHz)
Response time (0...90%, 100...10%): Temperature input.....	≤ 1 s
Response time (0...90%, 100...10%): mA / V input.....	≤ 400 ms
Auxiliary supplies: 2-wire supply (terminal 44...43).....	25...16 VDC / 0...20 mA
Accuracy.....	Better than 0.1% of selected range
EMC immunity influence.....	< ±0.5% of span
Extended EMC immunity: NAMUR NE 21, A criterion, burst.....	< ±1% of span

Input specifications

RTD input.....	Pt10, Pt20, Pt50, Pt100, Pt200, Pt250, Pt300, Pt400, Pt500, Pt1000 Ni50, Ni100, Ni120, Ni1000, Cu10, Cu20, Cu50, Cu100
RTD input.....	Linear resistance
RTD input.....	Potentiometer
Cable resistance per wire (max.), RTD.....	50 Ω
Sensor current, RTD.....	Nom. 0.2 mA
Effect of sensor cable resistance (3-/4-wire), RTD.....	< 0.002 Ω / Ω
Sensor error detection, RTD.....	Yes
Short circuit detection, RTD.....	< 15 Ω
TC input: Thermocouple type.....	B, E, J, K, L, N, R, S, T, U, W3, W5, LR
Cold junction compensation (CJC) via ext. sensor in connector 5910.....	20...28°C ≤ ±1°C, -20...20°C / 28...70°C ≤ 2°C
CJC via internally mounted sensor.....	±(2.0°C + 0.4°C * Δt)
Δt =.....	Internal temperature-ambient temperature
Sensor error detection, TC.....	Yes

Sensor error current: When detecting / else.....	Nom. 2 μA / 0 μA
Current input: Measurement range.....	0...20 mA
Current input: Programmable measurement ranges.....	0...20 and 4...20 mA
Input resistance, current input.....	Nom. 20 Ω + PTC 50 Ω
Voltage input: Measurement range.....	0...12 VDC
Programmable measurement ranges, VDC.....	0/0.2...1, 0/1...5, 0/2...10 VDC
Input resistance, voltage input.....	Nom. 10 MΩ

Output specifications

Current output: Signal range.....	0...20 mA
Programmable current ranges.....	0...20 / 4...20 / 20...0 and 20...4 mA
Load (max.).....	20 mA/800 Ω/16 VDC
Load stability, current output.....	≤0.01% of span / 100 Ω
Sensor error indication, current output.....	0 / 3.5 / 23 mA / none
NAMUR NE 43 Upscale/Downscale.....	23 mA / 3.5 mA
Current limit.....	≤ 28 mA
Voltage output: signal range.....	0...10 VDC
Programmable voltage ranges.....	0/0.2...1; 0/1...5; 0/2...10; 1...0.2/0; 5...1/0; 10...2/0 V
Load (min.).....	500 kΩ
*of span.....	= of the currently selected measurement range

Approvals

EMC.....	EN 61326-1
LVD 2006/95/EC.....	EN 61010-1
FM.....	3025177
UL.....	UL 508
EAC TR-CU 020/2011.....	EN 61326-1
DNV Marine.....	Stand. f. Certific. No. 2.4
SIL.....	Hardware assessed for use in SIL applications

Universal transmitter

4116



- Input for RTD, TC, Ohm, potentiometer, mA and V
- 2-wire supply > 16 V
- FM-approved for installation in Div. 2
- Output for current, voltage and 2 relays
- Universal AC or DC supply



Advanced features

- Programmable via detachable display front (4501), process calibration, signal and relay simulation, password protection, error diagnostics and selection of help text in several languages.

Application


- Linearized, electronic temperature measurement with RTD or TC sensor.
- Conversion of linear resistance variation to a standard analog current / voltage signal, i.e. from solenoids and butterfly valves or linear movements with attached potentiometer.
- Power supply and signal isolator for 2-wire transmitters.
- Process control with 2 pairs of potential-free relay contacts and analog output.
- Galvanic separation of analog signals and measurement of floating signals.
- The 4116 is designed according to strict safety requirements and is therefore suitable for application in SIL 2 installations.

Technical characteristics

- When 4116 is used in combination with the 4501 display / programming front, all operational parameters can be modified to suit any application. As the 4116 is designed with electronic hardware switches, it is not necessary to open the device for setting of DIP-switches.
- A green / red front LED indicates normal operation and malfunction. A yellow LED is ON for each active output relay.
- Continuous check of vital stored data for safety reasons.
- 4-port 2.3 kVAC galvanic isolation.


Connections

Input signals:

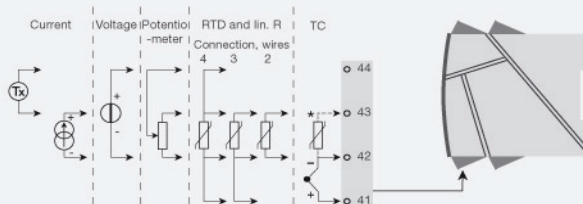


*Order separately: CJC connector 5910.

Output signals:

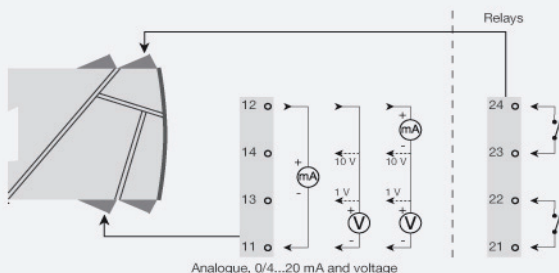

Supply:

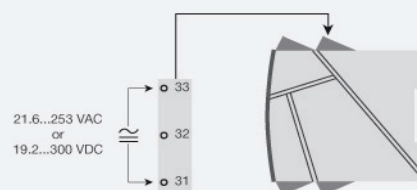

Order:

Type
4116

Environmental Conditions

Specifications range.....	-20°C to +60°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20

Mechanical specifications

Dimensions (HxWxD).....	109 x 23.5 x 104 mm
Dimensions (HxWxD) w/ 4501 / 4511.....	109 x 23.5 x 116 / 131 mm
Weight approx.....	170 g
Weight incl. 4501 / 4511 (approx.).....	185 g / 270 g
Wire size.....	1 x 2.5 mm ² stranded wire
Screw terminal torque.....	0.5 Nm
Vibration.....	IEC 60068-2-6 : 2007
Vibration: 2...13.2 Hz.....	±1 mm
Vibration: 13.2...100 Hz.....	±0.7 g

Common specifications

Supply voltage, universal.....	21.6...253 VAC, 50...60 Hz or 19.2...300 VDC
Fuse.....	400 mA SB / 250 VAC
Max. power consumption.....	≤ 2.5 W
Isolation voltage, test / working.....	2.3 kVAC / 250 VAC
Communications interface.....	Communication enabler 4511 / Programming front 4501
Signal / noise ratio.....	Min. 60 dB (0...100 kHz)
Response time (0...90%, 100...10%): Temperature input.....	≤ 1 s
Response time (0...90%, 100...10%): mA / V input.....	≤ 400 ms
Accuracy.....	Better than 0.1% of selected range
Auxiliary supplies: 2-wire supply (terminal 44...43).....	25...16 VDC / 0...20 mA
EMC immunity influence.....	< ±0.5% of span
Extended EMC immunity: NAMUR NE 21, A criterion, burst.....	< ±1% of span

Input specifications

RTD input.....	Pt10, Pt20, Pt50, Pt100, Pt200, Pt250, Pt300, Pt400, Pt500, Pt1000 Ni50, Ni100, Ni120, Ni1000, Cu10, Cu20, Cu50, Cu100
RTD input.....	Linear resistance
RTD input.....	Potentiometer
Cable resistance per wire (max.), RTD.....	50 Ω
Sensor current, RTD.....	Nom. 0.2 mA
Effect of sensor cable resistance (3-/4-wire), RTD.....	< 0.002 Ω / Ω
Sensor error detection, RTD.....	Yes
Short circuit detection, RTD.....	< 15 Ω
TC input: Thermocouple type.....	B, E, J, K, L, N, R, S, T, U, W3, W5, LR
Cold junction compensation (CJC) via ext. sensor in connector 5910.....	20...28°C ≤ ±1°C, -20...20°C / 28...70°C ≤ 2°C
CJC via internally mounted sensor.....	±(2.0°C + 0.4°C * Δt)
Δt =.....	Internal temperature-ambient temperature
Sensor error detection, TC.....	Yes

Sensor error current: When detecting / else.....	Nom. 2 μA / 0 μA
Current input: Measurement range.....	0...20 mA
Current input: Programmable measurement ranges.....	0...20 and 4...20 mA
Input resistance, current input.....	Nom. 20 Ω + PTC 50 Ω
Voltage input: Measurement range.....	0...12 VDC
Programmable measurement ranges, VDC.....	0/0.2...1, 0/1...5, 0/2...10 VDC
Input resistance, voltage input.....	Nom. 10 MΩ

Output specifications

Current output: Signal range.....	0...20 mA
Programmable current ranges.....	0...20 / 4...20 / 20...0 and 20...4 mA
Load (max.).....	20 mA/800 Ω/16 VDC
Load stability, current output.....	≤0.01% of span / 100 Ω
Sensor error indication, current output.....	0 / 3.5 / 23 mA / none
NAMUR NE 43 Upscale/Downscale.....	23 mA / 3.5 mA
Current limit.....	≤ 28 mA
Voltage output: signal range.....	0...10 VDC
Programmable voltage ranges.....	0/0.2...1; 0/1...5; 0/2...10; 1...0.2/0; 5...1/0; 10...2/0 V
Load (min.).....	500 kΩ
Relay output: Relay functions.....	Setpoint, Window, Sensor error, Latch, Power and Off
Hysteresis.....	0...100%
ON and OFF delay.....	0...3600 s
Max. voltage.....	250 VRMS
Max. current.....	2 AAC or 1 ADC
Max. AC power.....	500 VA
Sensor error reaction.....	Break / Make / Hold
*of span.....	= of the currently selected measurement range

Approvals

EMC.....	EN 61326-1
LVD 2006/95/EC.....	EN 61010-1
FM.....	3025177
UL.....	UL 508
EAC TR-CU 020/2011.....	EN 61326-1
DNV Marine.....	Stand. f. Certific. No. 2.4
SIL.....	Hardware assessed for use in SIL applications

Universal trip amplifier

4131



- Input for RTD, TC, Ohm, potentiometer, mA and V
- 2 adjustable alarm limits
- FM-approved for installation in Div. 2
- 2 relay outputs
- Universal AC or DC supply



Advanced features

- Programmable via detachable display front (4501), process calibration, relay simulation, password protection, error diagnostics and selection of help text in several languages.

Application


- Process control with 2 pairs of potential-free relay contacts which can be configured to suit any application.
- Trip amplifier with window function defined by a high and a low setpoint. The relay changes state outside the window.
- Relay latch function, where the relay is activated and can only be reset manually.
- Sophisticated sensor error surveillance, where one relay holds the state immediately prior to the sensor error, while allowing the process to continue. The other relay can be set for sensor error alarm so that the defect sensor can be replaced immediately.

Technical characteristics


- When 4131 is used with the 4501 display / programming front, all operational parameters can be modified to suit any application. As the 4131 is designed with electronic hardware switches, it is not necessary to open the device for setting of DIP-switches.
- A green front LED indicates normal operation and malfunction. A yellow LED is ON for each active output relay.
- Continuous check of vital stored data for safety reasons.
- 3-port 2.3 kVAC galvanic isolation.

Connections


Input signals:

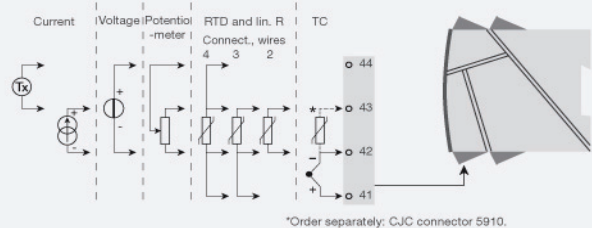

Output signals:



Supply:

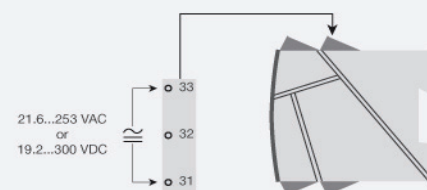

Order:

Type
4131

Environmental Conditions

Specifications range.....	-20°C to +60°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20

Mechanical specifications

Dimensions (HxWxD).....	109 x 23.5 x 104 mm
Dimensions (HxWxD) w/ 4501 / 4511.....	109 x 23.5 x 116 / 131 mm
Weight approx.....	170 g
Weight incl. 4501 / 4511 (approx.).....	185 g / 270 g
Wire size.....	1 x 2.5 mm ² stranded wire
Screw terminal torque.....	0.5 Nm
Vibration.....	IEC 60068-2-6 : 2007
Vibration: 2...13.2 Hz.....	±1 mm
Vibration: 13.2...100 Hz.....	±0.7 g

Common specifications

Supply voltage, universal.....	21.6...253 VAC, 50...60 Hz or 19.2...300 VDC
Fuse.....	400 mA SB / 250 VAC
Max. power consumption.....	≤ 2.0 W
Isolation voltage, test / working.....	2.3 kVAC / 250 VAC
Communications interface.....	Communication enabler 4511 / Programming front 4501
Signal / noise ratio.....	Min. 60 dB (0...100 kHz)
Response time (0...90%, 100...10%): Temperature input.....	≤ 1 s
Response time (0...90%, 100...10%): mA / V input.....	≤ 400 ms
Accuracy.....	Better than 0.1% of selected range
Auxiliary supplies: 2-wire supply (terminal 44...43).....	25...16 VDC / 0...20 mA
EMC immunity influence.....	< ±0.5% of span
Extended EMC immunity: NAMUR NE 21, A criterion, burst.....	< ±1% of span

Input specifications

RTD input.....	Pt10, Pt20, Pt50, Pt100, Pt200, Pt250, Pt300, Pt400, Pt500, Pt1000 Ni50, Ni100, Ni120, Ni1000, Cu10, Cu20, Cu50, Cu100
RTD input.....	Linear resistance
RTD input.....	Potentiometer
Cable resistance per wire (max.), RTD.....	50 Ω
Sensor current, RTD.....	Nom. 0.2 mA
Effect of sensor cable resistance (3-/4-wire), RTD.....	< 0.002 Ω / Ω
Sensor error detection, RTD.....	Yes
Short circuit detection, RTD.....	< 15 Ω
TC input: Thermocouple type.....	B, E, J, K, L, N, R, S, T, U, W3, W5, LR
Cold junction compensation (CJC) via ext. sensor in connector 5910.....	20...28°C ≤ ±1°C, -20...20°C / 28...70°C ≤ 2°C
CJC via internally mounted sensor.....	±(2.0°C + 0.4°C * Δt)
Δt =.....	Internal temperature-ambient temperature
Sensor error detection, TC.....	Yes

Sensor error current: When detecting / else.....	Nom. 2 μA / 0 μA
Current input: Measurement range.....	0...20 mA
Current input: Programmable measurement ranges.....	0...20 and 4...20 mA
Input resistance, current input.....	Nom. 20 Ω + PTC 50 Ω
Voltage input: Measurement range.....	0...12 VDC
Programmable measurement ranges, VDC.....	0/0.2...1, 0/1...5, 0/2...10 VDC
Input resistance, voltage input.....	Nom. 10 MΩ

Output specifications

Relay output: Relay functions.....	Setpoint, Window, Sensor error, Latch, Power and Off
Hysteresis.....	0...100%
ON and OFF delay.....	0...3600 s
Max. voltage.....	250 VRMS
Max. current.....	2 AAC or 1 ADC
Max. AC power.....	500 VA
Sensor error reaction.....	Break / Make / Hold
*of span.....	= of the currently selected measurement range

Approvals

EMC.....	EN 61326-1
LVD 2006/95/EC.....	EN 61010-1
FM.....	3025177
UL.....	UL 508
EAC TR-CU 020/2011.....	EN 61326-1
DNV Marine.....	Stand. f. Certific. No. 2.4

Universal I/f converter



4222

- Input for RTD, TC, Ohm, potentiometer, mA and V
- Frequency output NPN, PNP and TTL
- Generates frequencies from 0.001...25000 Hz
- 2-wire supply > 16 V
- Universal AC or DC supply



Advanced features

- Programmable via detachable display front (4501), process calibration, signal simulation, password protection, error diagnostics and selection of help text in several languages.

Application


- Linearized, electronic temperature measurement with RTD or TC sensor.
- Conversion of linear resistance variation to a frequency signal, e.g. from solenoids and butterfly valves or linear movements with attached potentiometer.
- Power supply and signal isolator for 2-wire transmitters.
- Process control by way of a frequency signal transmitted to e.g. a PLC or a process computer.
- Galvanic separation and conversion of analog signals to frequency signals.

Technical characteristics


- When 4222 is used in combination with the 4501 display / programming front, all operational parameters can be modified to suit any application. As the 4222 is designed with electronic hardware switches, it is not necessary to open the device for setting of DIP switches.
- A green front LED indicates normal operation.
- Continuous check of vital stored data for safety reasons.
- 3-port 2.3 kVAC galvanic isolation.

Connections


Input signals:

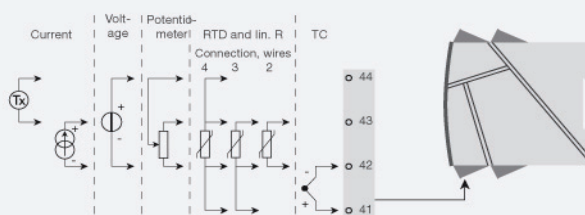

Output signals:

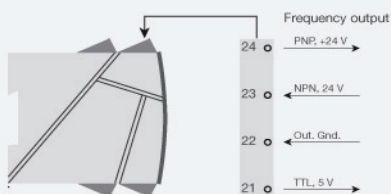

Supply:

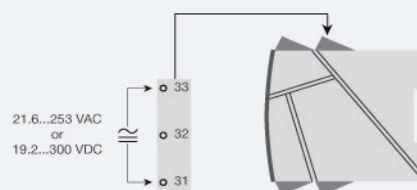

Order:

Type
4222

Environmental Conditions

Specifications range.....	-20°C to +60°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20

Mechanical specifications

Dimensions (HxWxD).....	109 x 23.5 x 104 mm
Dimensions (HxWxD) w/ 4501 / 4511.....	109 x 23.5 x 116 / 131 mm
Weight approx.....	155 g
Weight incl. 4501 / 4511 (approx.).....	170 g / 255 g
Wire size.....	1 x 2.5 mm ² stranded wire
Screw terminal torque.....	0.5 Nm

Common specifications

Supply voltage, universal.....	21.6...253 VAC, 50...60 Hz or 19.2...300 VDC
Fuse.....	400 mA SB / 250 VAC
Max. power consumption.....	≤ 2.5 W
Isolation voltage, test / working.....	2.3 kVAC / 250 VAC
Communications interface.....	Communication enabler 4511 / Programming front 4501
Signal / noise ratio.....	Min. 60 dB (0...100 kHz)
Response time (0...90%, 100...10%):	
Temperature input (programmable).....	1...60 s
mA / V input (programmable).....	0.4...60 s
Accuracy.....	Better than 0.1% of selected range
Auxiliary supplies: 2-wire supply (terminal 44...43).....	25...16 VDC / 0...20 mA
EMC immunity influence.....	< ±0.5% of span
Extended EMC immunity: NAMUR NE 21, A criterion, burst.....	< ±1% of span

Input specifications

RTD input.....	Pt100, Ni100, lin. R
RTD input.....	Potentiometer
Cable resistance per wire (max.), RTD.....	50 Ω
Sensor current, RTD.....	Nom. 0.2 mA
Sensor error detection, RTD.....	Yes
Short circuit detection, RTD.....	< 15 Ω
TC input: Thermocouple type.....	B, E, J, K, L, N, R, S, T, U, W3, W5, LR
CJC via internally mounted sensor.....	< ±1.0°C
Sensor error detection, TC.....	Yes
Sensor error current: When detecting / else.....	Nom. 2 µA / 0 µA
Current input: Measurement range.....	0...20 mA
Current input: Programmable measurement ranges.....	0...20 and 4...20 mA
Input resistance, current input.....	Nom. 20 Ω + PTC 50 Ω
Voltage input: Measurement range.....	0...12 VDC
Programmable measurement ranges, VDC.....	0/0.2...1, 0/0.5...2.5, 0/1...5, 0/2...10 VDC
Input resistance, voltage input.....	Nom. 10 MΩ

Output specifications

Frequency output range.....	0...25000 Hz
Min. frequency (span).....	0.001 Hz
Other output types.....	PNP, NPN and TTL
Sensor error indication, programmable.....	0...26250 Hz
*of span.....	= of the currently selected measurement range

Approvals

EMC.....	EN 61326-1
LVD 2006/95/EC.....	EN 61010-1
UL.....	UL 508
EAC TR-CU 020/2011.....	EN 61326-1



Communication enabler

4511

- Programming display for system 4000 and 9000 devices
- Modbus RTU protocol interface over RS-485
- Monitor process value from the built-in display
- High 2.5 kV isolation to host unit
- Shielded RJ45 connector on top



Application

- The 4511 detachable display adds Modbus RTU RS-485 serial communications to all current and future 4000/9000 units.
- The unit converts a wide array of sensors and analog device signals measured by the system 4000 like uni- and bipolar mA and voltage signals, potentiometer, Lin. R, RTD and TC, to a Modbus communication line signal.
- When mounted on a system 9000 device any signal coming from or going to I.S. classified area, like AI, AO, DI and DO signals, can be converted to a Modbus network.
- All individual unit operating parameters can easily and quickly be configured by using the Modbus communication or by using the front display menu.
- The easily readable 4511 display can be used to read the process signal, simulate the output signal, indicate sensor errors and internal device errors.


Technical characteristics

- 4511 has full 4501 functionality for unit programming, process signal monitoring and diagnostics handling.
- Modbus RTU protocol is supported using a serial RS-485 communication wiring.
- Multidrop half-duplex connection via shielded RJ45 connector.
- High safe galvanic isolation of 2.5 kVAC between the serial wiring and the connected system 4000/9000 units.
- Modbus parameters such as address, baud rate, stop bit(s), and parity bit are configured from the 4511 display, which also stores parameters.

Mounting / installation / programming

- Mounting in Zone 2 / Div. 2.
- The 4511 can be moved from one device to another. The individual system 4000/9000 unit configuration of the first device can be saved and downloaded to subsequent devices.
- Programmed parameters can be protected by a userdefined password.
- When mounted on devices that are installed upside down, a menu item allows the display on the 4511 to be rotated 180° and the up/down buttons to switch function.

Connections

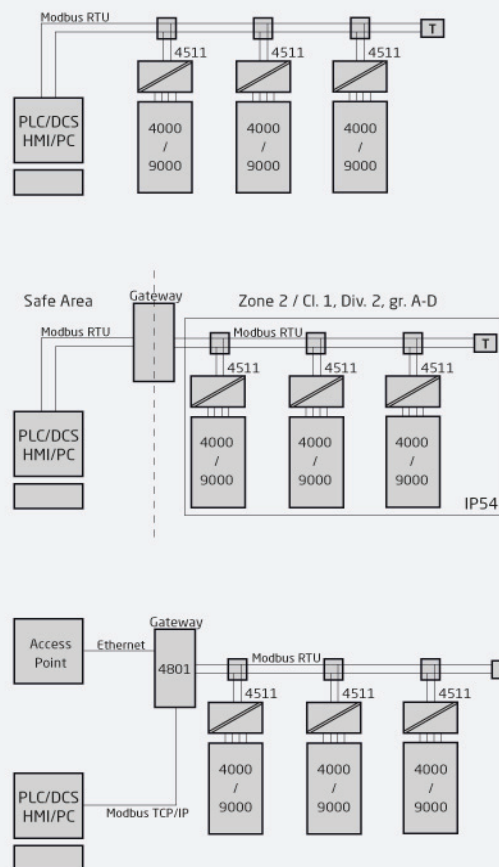

Up to 32 devices per segment without the use of a network repeater

Order:

Type
4511

Environmental Conditions

Specifications range.....	-20°C to +60°C
Storage temperature.....	-20°C to +85°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20
Installation in.....	Pollution degree 2 & measurement / overvoltage cat. II

Mechanical specifications

Dimensions (HxWxD).....	73.2 x 23.3 x 26.5 mm
Dimensions (HxWxD) w/ 4000/9000 unit.....	109 x 23.5 x 131 mm
Weight approx.....	100 g
Connection.....	RJ45 - shielded

Common specifications

Max. power consumption.....	≤ 0.15 W
Isolation voltage, test / working.....	2.5 kVAC / 250 VAC reinforced isolation
Signal / noise ratio.....	> 60 dB
Response time.....	< 20 ms
Update rate.....	> 50 Hz
Extended EMC immunity: NAMUR NE 21, A criterion, burst.....	No loss of communication
Signal type.....	RS-485 half duplex
Serial protocol.....	Modbus RTU
Modbus mode.....	RTU - slave
Devices on an RS485 line.....	Up to 32 (w/o a repeater)
Data rates, baud.....	2400, 4800, 9600, 19200, 38400, 57600, 115200
Automatic baudrate detection.....	Yes - can be configured ON or OFF
Parity.....	Even, Odd, None
Stop bit(s).....	1 or 2
Digital addressing.....	1...247
Response delay.....	0...1000 ms

Approvals

EMC.....	EN 61326-1
LVD 2006/95/EC.....	EN 61010-1
DNV Marine.....	Stand. f. Certific. No. 2.4
ATEX 2004/108/EC.....	DEKRA 13ATEX0098 X
IECEx.....	DEK 13.0026 X
FM.....	0003049132-C
UL.....	UL 61010-1
EAC TR-CU 020/2011.....	EN 61326-1



Display / programming front

4501

- Modification of operational parameters in system 4000 and 9000 devices
- Fixed display for visualisation of process data and status
- Password protection
- Scrolling help text in 7 languages
- Clicks on to the front of the device mounted in the process



Application

- Communications interface for modification of operational parameters in system 4000 and 9000 devices.
- Can be moved from one device to another of the same type and download the configuration of the first device to subsequent devices.
- Fixed display for visualization of process data and status.

Technical characteristics

- LCD display with 4 lines featuring scrolling help text in 7 languages which guides the user effortlessly through all the configuration steps.
- Programming access can be blocked by assigning a password. The password is saved in the device in order to ensure a high degree of protection against unauthorized modifications to the configuration.

Mounting / installation

- Click 4501 onto the front of the device mounted in the process.

Order:

Type
4501



ConfigMate

4590

- Docking station for the PR 4501 display
- Handheld adaptor for programming the PR 3114 universal transmitter via the 4501 display
- Configuration upload and download tool on selected PR System 4000 and 9000 units
- Interfaces with the PR Preset software



Application

- The ConfigMate 4590 is used along with the 4501 programming display.
- 4590 can operate as a docking station for the 4501 display - allowing the 4501 to be connected to a PC and the PR Preset software.
- 4590 works standalone in adaptor mode for programming a PR 3114 unit.
- Upload and download function is for backup and restore purposes on selected PR 4000 and 9000 devices.
- The unit must be used together with PR Preset software to upload and download configuration parameters from a 4501 display.

Technical characteristics


- In docking station mode the 4590 will be powered from the PC's USB power source.
- The included USB-B to a 2.5 mm jack cable must be used for connecting to a PR 3114.
- In adapter mode the included USB-B to USB-A cable must be used for connecting to a PC.
- 3 x 1.5 V AAA batteries must be inserted for powering the 4590 in adapter mode.
- Indication of battery level is displayed via the 3 green front LEDs.
- The 4590 will automatically detect if it is not in use, and will consequently shut itself down to conserve battery power.
- Battery life in adaptor mode is approximately 1 year of daily use, depending upon battery type.

Order:


Type
4590

Connections

Connection of 4590 to a PR 3114 device in adaptor mode:

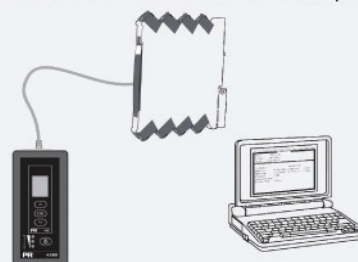

Connection of ConfigMate 4590 to a PR 4000/9000 device:

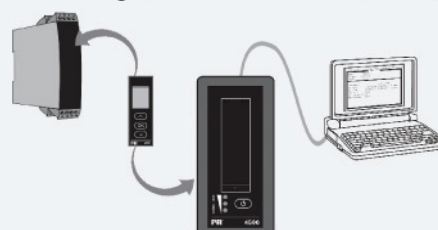

Connection of 4590 to a PC in docking mode:

