

6100XIO 6180XIO


MODELS

- Color touchscreen display
- Modbus master
- 96MB non-volatile Flash memory
- Ethernet TCP/IP
- Serial comms
- Compact Flash
- USB 'plug & play'
- Web server
- EtherNet/IP server
- Multi-language support (including Chinese, Korean, and Cyrillic)



Distributed Graphic Recorders Specification Sheet

Each 6000XIO instrument has an intuitive, touch screen display to enable operators to clearly view process data in varying formats. All have onboard Flash data storage capability, Ethernet communication and Compact Flash Card. Data is stored in a tamper-resistant binary format that can be used for secure, long term records of your process. The 6000XIO is truly designed for today's networked world and can be accessed via a Local Area Network, dial-up connection, Intranet or Internet.

Available features		
	6100XIO	6180XIO
Display	5.5" 1/4 VGA	12.1" XGA
Comms channels (standard)	18	48
Additional virtual channels*	36, 96, 128	
Groups	6 standard (12 optional)	
Auditor features	Auditor or Audit Trail	
Timers	Fitted as standard	
Alarms	4 per channel	
Batch	Optional	
Bridge- Remote viewing software	Lite as standard (Full optional)	
Screen builder	24 screens (optional)	
Security	Unlimited unique user names with configurable access permissions and passwords	
Configuration software	Standard	
Review/Quickchart Lite software	Standard	
Standard views	Vertical and horizontal trending, Vertical and horizontal Bargraphs, Circular Trend and Numeric Values	
Modbus slaves	16 Standard (32 optional)	

* Virtual channels can be configured as Maths, Totalisers, Counters or Comms

imagine absolute data records forever

Data logging and archiving

The 6000XIO recorders have internal Flash memory for secure data storage. They are also able to accept various removable media types (compact flash or USB memory stick). Data stored within the internal memory can be archived to the removable media on demand or at preset intervals. The 6000XIO will give indication of how long its internal memory and that of the removable media installed will last according to the configuration of the recorder.

All 6000XIOs have Ethernet capability. The 6000XIO can be configured to archive to the removable media and / or over Ethernet. Archiving files over Ethernet effectively gives a secure, infinite archiving capacity.

Approximate duration for continuous recording of one Group of six channels, high compression:

Archive Media	Sample Rate						
	0.125s	0.5s	1s	5s	10s	30s	60s
32Mb Internal Flash (approx. 4 million samples)	2.83 days	11.3 days	22.6 days	113 days	226 days	1.86 yrs	3.7 yrs
64Mb CF Card or USB memory stick (approx. 8 million samples)	5.66 days	22.6 days	45.3 days	226 days	1.2 yrs	3.7 yrs	7.4 yrs
256Mb CF Card or USB memory stick (approx. 32 million samples)	22.6 days	90.6 days	181 days	2.4 yrs	4.9 yrs	14.8 yrs	20 yrs
1Gb CF Card or USB memory stick (approx. 125 million samples)	88 days	354 days	1.9 yrs	9.6 yrs	19 yrs	58 yrs	116 yrs
8Gb CF Card or USB memory stick (approx. 1000 million samples)	1.9 yrs	7.8 ys	15.2 yrs	76.8 yrs	152 yrs	464 yrs	928 yrs
16Gb CF Card or USB memory stick (approx. 2000 million samples)	3.8 yrs	15.6 yrs	30.4 yrs	153.6 yrs	304 yrs	928 yrs	1856 yrs
Ethernet (FTP Server)	Infinite						

Time synchronisation (SNTP)

The 6000XIO support Simple Network Time Protocol which, when enabled, updates the instrument time every 15 minutes from the configured SNTP server. The unit can also act as a Unicast SNTP server on the network, allowing client instruments to synchronise with the 6000XIO to a resolution of one millisecond.

Batch recording

Up to ten user-defined fields can be used to enter batch specific data.

Field	Descriptor	Operator entered batch information
- up to 20 characters		- up to 60 characters

The user can choose to log any number of the given fields on start and / or stop of a batch. The information will appear on the chart as a message and cannot be separated from the process data to which it relates

Auditor features

Auditor

Designed to meet the requirements of the FDA Regulation 21 CFR Part 11 for Electronic Records and Signatures, this software option provides the 6000XIO with additional security such as password ageing, electronic signatures and time stamped audit trail.

Audit trail

A sub-set of the Auditor which provides the 6000XIO with a time stamped audit trail. It does not include password ageing and electronic signatures.

Mircosoft® Active Directory® directory service

A utility intended for User Access Administration of PCs. It is a tool used by the IT administrators to manage user access across the company wide network. It allows users to be given access according to their functions by allocating them to a group with defined privileges. It also includes the necessary features such as password expiry, auto-logout, minimum length password, etc. It allows the users to manage their password from any node on the system.

Modbus master

Allows users to view data from multiple instruments connected either by a local Network connection using Modbus TCP, or a Serial connection using Modbus RTU.

Reports

Fitted as standard the Reports option provides the 6000XIO with the ability to generate up to 10 simple reports that can be displayed as part of the recorded data. Reports, triggered by an event/job can be configured to contain parameters such as time and date, batch names, process values and user defined messages.

Dynamic Host Configuration Protocol (DHCP)

Dynamic Host Configuration Protocol, the successor to BootP, allows a 6000XIO host to obtain Network parameters, such as IP address, Subnet Mask, default gateway and DNS server address dynamically. The implementation of DHCP on the 6000XIO significantly reduces the overhead for maintaining a network of instrumentation.

SPECIFICATION

Environmental performance	
Temperature limits	Operation: 0 to +50°C Storage: -20 to 60°C
Humidity limits	Operation: 5% to 80% RH (non condensing) Storage: 5% to 95% RH (non condensing)
Protection	Bezel and display: IP65 Sleeve (rear of panel): IP20
Vibration (10Hz to 150Hz):	1g peak

Approvals	
Electromagnetic compatibility CE, (EMC)	
Emissions and immunity:	BS EN61326

Electrical safety	
(BS EN61010):	Installation cat. II; Pollution degree 2

INSTALLATION CATEGORY II	
The rate impulse voltage for equipment on nominal 230V mains is 2500V.	
POLLUTION DEGREE 2	
Normally, only non-conductive pollution occurs. Occasionally, however, a temporary conductivity caused by condensation shall be expected	

Physical	
Panel mounting:	DIN43700
Panel mounting angle:	Vertical
6100XIO	Bezel size: 144 x 144mm Panel cutout dimensions: 138 x 138mm (both -0/+1mm) Depth behind panel: 87.7mm Weight: 1.5kg
6180XIO	Bezel size: 288 x 288mm Panel cutout dimensions: 282 x 282mm (both -0/+1.3mm) Depth behind panel: 70.4mm Weight: 3.7kg

Operator interface	
Type:	Colour TFT LCD, with cold cathode backlight, fitted with resistive, analogue, touch panel
Size and resolution	6100XIO: 1/4VGA (320 x 240 pixels) 5.5" 6180XIO: XGA (1024 x 768 pixels) 12.1"



Power requirements	
Supply voltage:	19.2 to 28.8V dc (24V dc nominal)
Power consumed	6100XIO: 20W 6180XIO: 24W
Fuse:	No user replaceable fuses
Inrush current:	10A max

Ethernet communications	
Ethernet Port:	10/100Mbps Auto Sensing
Protocols:	TCP/IP, FTP, DHCP, BOOTP, SNTP, MODBUS, SMTP, ICMP, EtherNet/IP
Cable	Type: CAT5 Maximum length: 100 metres Termination: RJ45 (shielded)

Serial communications	
No. of Ports:	2
Protocol:	Modbus RTU Master and Slave
Transmission standard:	EIA422 or EIA485 Half Duplex

Back-up battery	
Type:	Poly-carbonmonofluoride/lithium (BR2330)
Support time (RTC):	1 year min. with recorder unpowered
Replacement period:	3 years
Stored data:	Time; values for totalisers, counters and timers; batch data; Fvalue, Rolling average, Stopwatch etc.

Mechanical Details

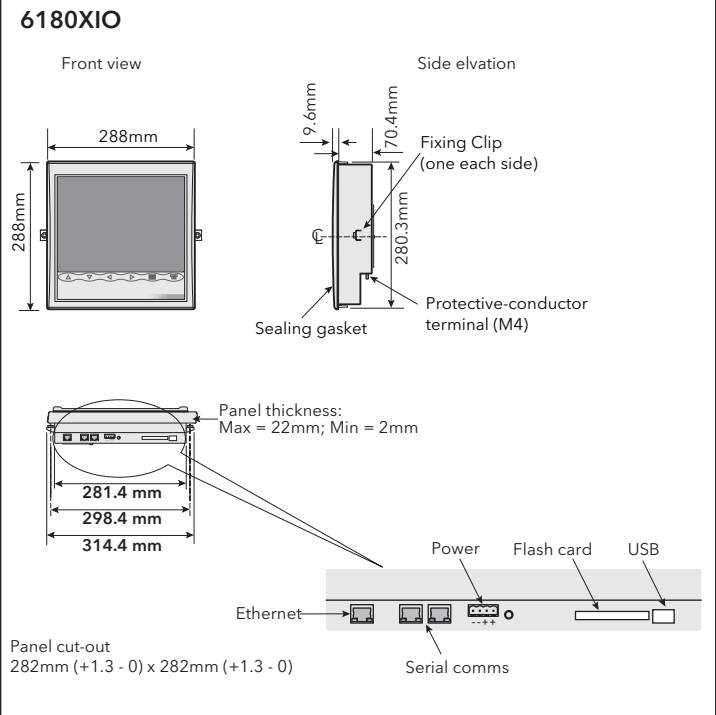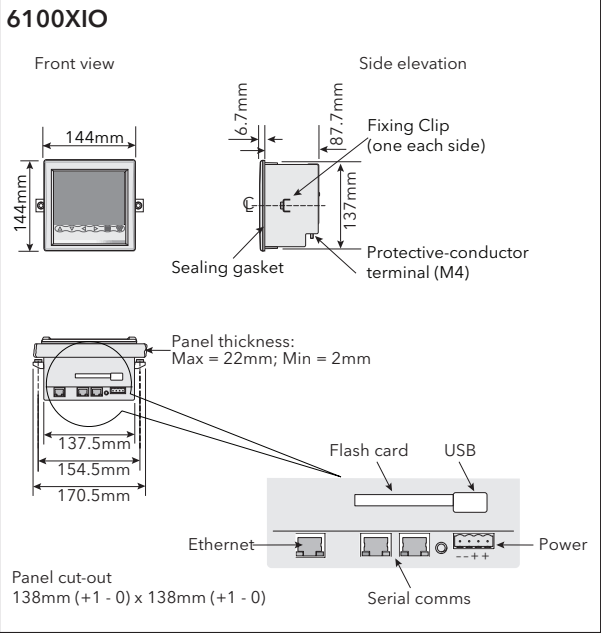

Panel Mounting Details

Installed panel angle: Vertical panels only

Minimum inter-unit spacing: 50mm vertical or horizontal

Note: Where multiple units are mounted in close proximity with one another, steps must be taken to ensure that the resulting ambient temperature does not exceed the specified maximum operating temperature of 50 degrees Celsius.

Ordering Codes

	1	2	3	4	5	6	7	8	9	10	11	12	13
14	15	16	17										
	XXXXX	XXXXX											

Basic Product	
6100XIO	6100XIO 100mm TFT 1/4VGA Display
6180XIO	6180XIO 180mm TFT XGA Display
1 Internal Memory	
096M	096M byte for history
2 Non-Standard Option	
XXXXXX	Default
3 Memory Card Size	
NOMC	None
002G	2GB Card CF
004G	4GB Card CF
008G	8GB Card CF
016G	16GB Card CF

4 USB Memory Stick Size	
NOMS	None
002GMS	2GB
004GMS	4GB
008GMS	8GB
016GMS	16GB
5 Warranty	
XXXXX	Standard
WL005	5 Year
6 Bridge	
BLITE	Lite (standard)
BFULL	Full
7 Review and QuickChart	
RLITE	Lite (standard)
RFULL	Full

8 Auditor	
NOADT	None
ALITE	Audit Trail
AFULL	Auditor
9 Security Manager	
NOSM	None
SECMAN	Security Manager (inc. Active Directory)
10 Groups	
06GROUP	6 (standard)
12GROUP	12
11 Maths, Totalisers & Counters	
MTC00	None
MTC36	36 virtual chs
MTC96	96 virtual chs
MTC128	128 virtual chs

12 Batch	
NOBATCH	None
BATCH	Batch
13 Screen Builder	
NOSB	None
ADSB	Advanced
14 Modbus Master Comms	
MSTR16	16 Slaves (standard)
MSTR32	32 Slaves
17 EtherNet Communications Protocol	
NONE	Not fitted
ESERV	EtherNet/IP server

Eurotherm:

International sales and service



www.eurotherm.com

AUSTRALIA Melbourne
Invensys Process Systems
Australia Pty. Ltd.
T (+61 0) 8562 9800
F (+61 0) 8562 9801
E info.eurotherm.au@invensys.com

AUSTRIA Vienna
Eurotherm GmbH
T (+43 1) 7987601
F (+43 1) 7987605
E info.eurotherm.at@invensys.com

BELGIUM & LUXEMBOURG
Moha
Eurotherm S.A./N.V.
T (+32) 85 274080
F (+32) 85 274081
E info.eurotherm.be@invensys.com

BRAZIL Campinas-SP
Eurotherm Ltda.
T (+5519) 3707 5333
F (+5519) 3707 5345
E info.eurotherm.br@invensys.com

CHINA
Eurotherm China
T (+86 21) 61451188
F (+86 21) 61452602
E info.eurotherm.cn@invensys.com

Beijing Office
T (+86 10) 5909 5700
F (+86 10) 5909 5709/10
E info.eurotherm.cn@invensys.com

FRANCE Lyon
Eurotherm Automation SA
T (+33 478) 664500
F (+33 478) 352490
E info.eurotherm.fr@invensys.com

GERMANY Limburg
Eurotherm Deutschland GmbH
T (+49 6431) 2980
F (+49 6431) 298119
E info.eurotherm.de@invensys.com

INDIA Mumbai
Invensys India Pvt. Ltd.
T (+91 22) 67579800
F (+91 22) 67579999
E info.eurotherm.in@invensys.com

IRELAND Dublin
Eurotherm Ireland Limited
T (+353 1) 4691800
F (+353 1) 4691300
E info.eurotherm.ie@invensys.com

ITALY Como
Eurotherm S.r.l.
T (+39 031) 975111
F (+39 031) 977512
E info.eurotherm.it@invensys.com

KOREA Seoul
Invensys Operations Management
Korea
T (+82 2) 2090 0900
F (+82 2) 2090 0800
E info.eurotherm.kr@invensys.com

NETHERLANDS Alphen a/d Rijn
Eurotherm B.V.
T (+31 172) 411752
F (+31 172) 417260
E info.eurotherm.nl@invensys.com

POLAND Katowice
Invensys Eurotherm Sp z o.o.
T (+48 32) 7839500
F (+48 32) 7843608/7843609
E info.eurotherm.pl@invensys.com

SPAIN Madrid
Eurotherm España SA
T (+34 91) 6616001
F (+34 91) 6619093
E info.eurotherm.es@invensys.com

SWEDEN Malmö
Eurotherm AB
T (+46 40) 384500
F (+46 40) 384545
E info.eurotherm.se@invensys.com

SWITZERLAND Wollerau
Eurotherm Produkte (Schweiz) AG
T (+41 44) 7871040
F (+41 44) 7871044
E info.eurotherm.ch@invensys.com

UNITED KINGDOM Worthing
Eurotherm Limited
T (+44 1903) 268500
F (+44 1903) 265982
E info.eurotherm.uk@invensys.com

U.S.A. Ashburn VA
Invensys Eurotherm
T (+1 703) 724 7300
F (+1 703) 724 7301
E info.eurotherm.us@invensys.com

ED64

Eurotherm is also represented in the following countries:

Afghanistan	Latvia
Albania	Lesotho
Algeria	Libya
Angola	Lithuania
Argentina	Macedonia
Armenia	Madagascar
Azerbaijan	Malaysia
Bahrain	Malta
Bangladesh	Micronesia
Barbados	Moldova
Belarus	Morocco
Bermuda	Mozambique
Bolivia	Myanmar
Bosnia and Herzegovina	Namibia
Botswana	Nicaragua
Brazil	Niger
Brunei Darussalam	Nigeria
Bulgaria	Norway
Cambodia	Oman
Cameroon	Pakistan
Canada	Palestinian Territory
Central African Republic	Papua New Guinea
Chad	Paraguay
Chile	Peru
Colombia	Philippines
Congo	Poland
Costa Rica	Qatar
Côte d'Ivoire	Romania
Croatia	Russia
Cyprus	Rwanda
Czech Republic	Saudi Arabia
Denmark	Senegal
Djibouti	Serbia and Montenegro
Ecuador	Sierra Leone
Egypt	Singapore
El Salvador	Slovakia
Eritrea	Slovenia
Estonia	Somalia
Ethiopia	South Africa
Fiji	Sri Lanka
Finland	Sudan
Georgia	Swaziland
Ghana	Syria
Greece	Tajikistan
Greenland	Tanzania
Guinea	Thailand
Hungary	The Gambia
Iceland	Tunisia
Indonesia	Turkey
Iraq	Turkmenistan
Israel	Uganda
Jamaica	Ukraine
Japan	United Arab Emirates
Jordan	Uruguay
Kazakhstan	Uzbekistan
Kenya	Venezuela
Kuwait	Vietnam
Kyrgyzstan	Yemen
Laos	Zambia
	Zimbabwe

Represented by:

© Copyright Eurotherm Limited 2011

Invensys, Eurotherm, the Eurotherm logo, Chessell, EurothermSuite, Mini8, Eycon, Eyris, EPower, nanodac, Foxboro and Wonderware are trademarks of Invensys plc, its subsidiaries and affiliates. All other brands may be trademarks of their respective owners.

All rights are strictly reserved. No part of this document may be reproduced, modified, or transmitted in any form by any means, nor may it be stored in a retrieval system other than for the purpose to act as an aid in operating the equipment to which the document relates, without the prior written permission of Eurotherm Limited.

Eurotherm Limited pursues a policy of continuous development and product improvement. The specifications in this document may therefore be changed without notice. The information in this document is given in good faith, but is intended for guidance only.

Eurotherm Limited will accept no responsibility for any losses arising from errors in this document.

i n v e n s y s
Operations Management